


# OMEGA 3%

OPENNESS FACTOR 3% SCREEN FABRIC



Your Solutions Weaver and Fabric Support Partner

Omega is a popular fabric known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.

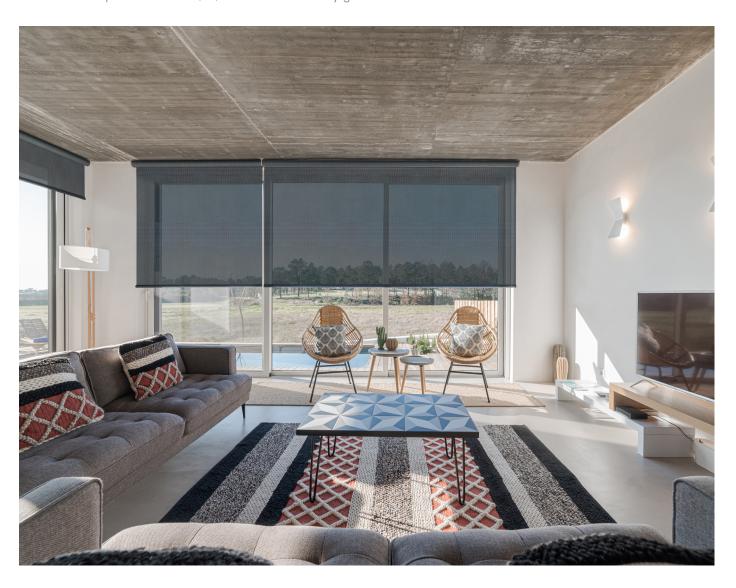



RO LLER SH AD ES




RO MA N SH AD ES




PA NE L TR AC KS



SK YLIGHT TR AC KS

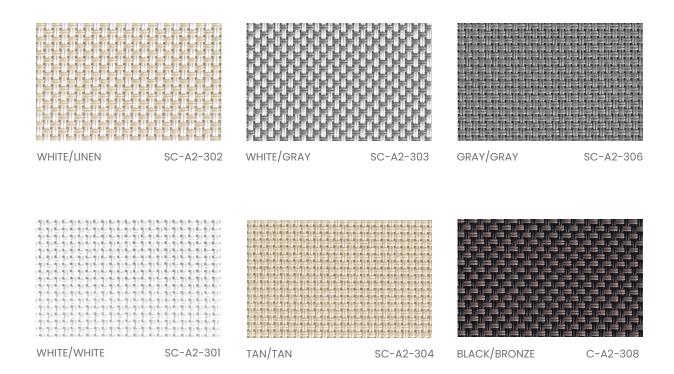



BLACK/GRAY SC-A2-310



BLACK/BLACK SC-A2-311

BRIGHT WHITE SC-A2-300

#### **FABRICATION METHODS**

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

### PRODUCT SPECIFICATIONS

COMPOSITION 30% Polyester + 70% PVC

ROLL WIDTH 98" / 118"

ROLL LENGTH 33 yd

WEIGHT / YD $^2$  12.96 oz/yd $^2$  THICKNESS .026"  $\pm$  5% COLOR FASTNESS 8 Grade (SGS)

YARN COUNT 54\*44

BREAKING STRENGTH Warp 1800 N/5cm

Weft 1434 N/5cm

#### CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

## CERTIFICATIONS, TESTS, AND WARRANTY



FLAME RETARDANT

OEKO-TEX® STANDARD 100

FREE OF HARMFU

UL GREENGUARD GOLD

HEALTHY INDOO AIR QUALITY ROHS COMPLIANT

> FREE OF HARMFU MFTALS

10 YEAR WARRANTY

> QUALITY GUARANTEED

**ASTM** G-21 & E-2180

BACTERIA & FUNGAL RESISTANO NFPA® 701-TM

FIRE RETARDANT

